


Aurele

Semi Decorative collection of fixtures which gives the flexibility to provide different shapes & designs offering a unique aesthetic setup




Project - Aman Hospital
Doha, Qatar

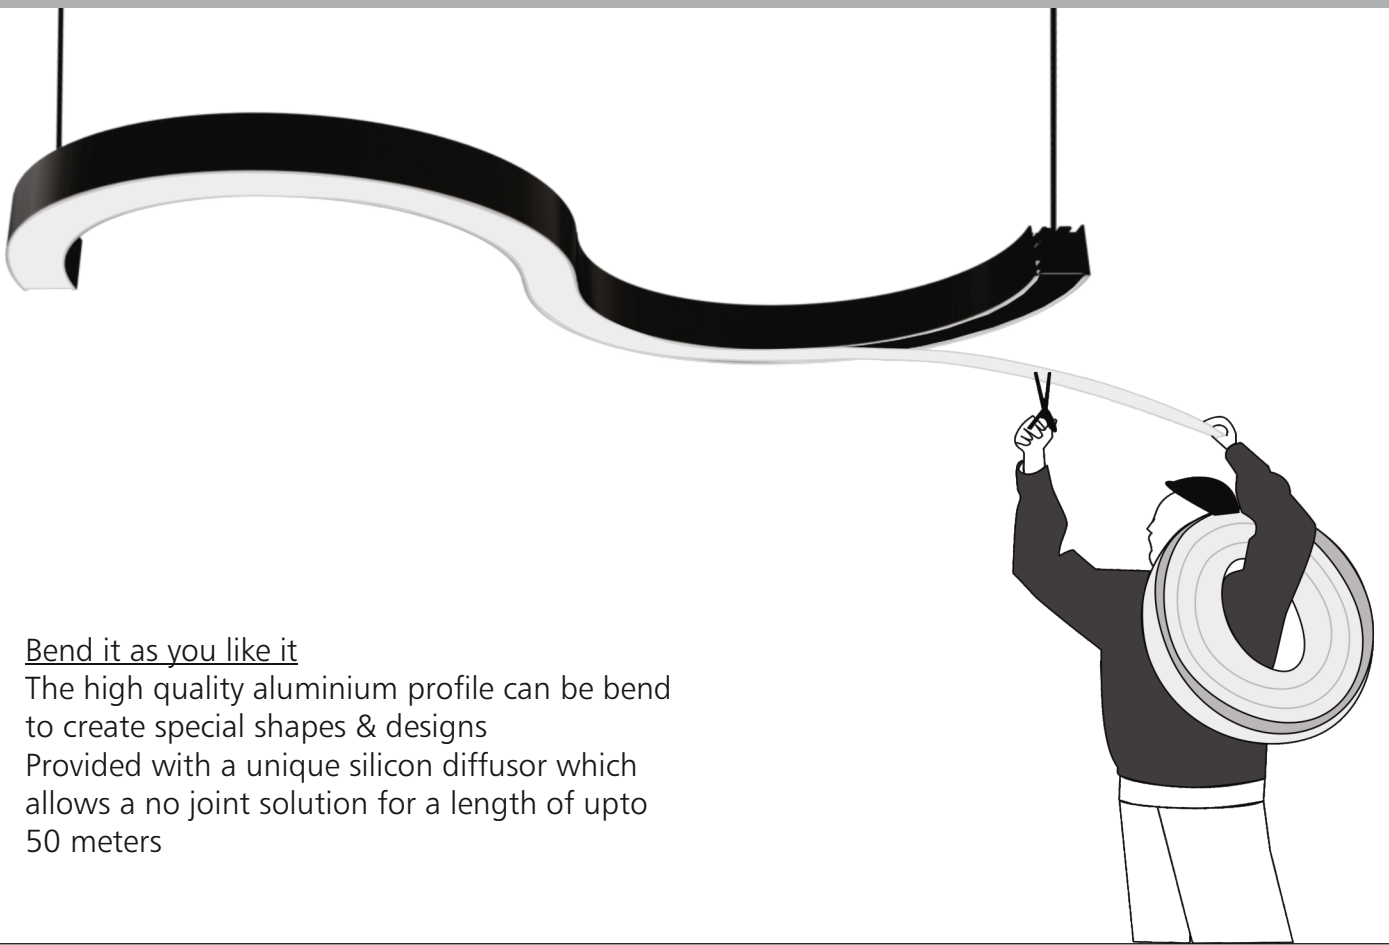

Bend it as you like it

The high quality aluminium profile can be bend to create special shapes & designs
Provided with a unique silicon diffusor which allows a no joint solution for a length of upto 50 meters





Shapes & Designs to suit project requirements

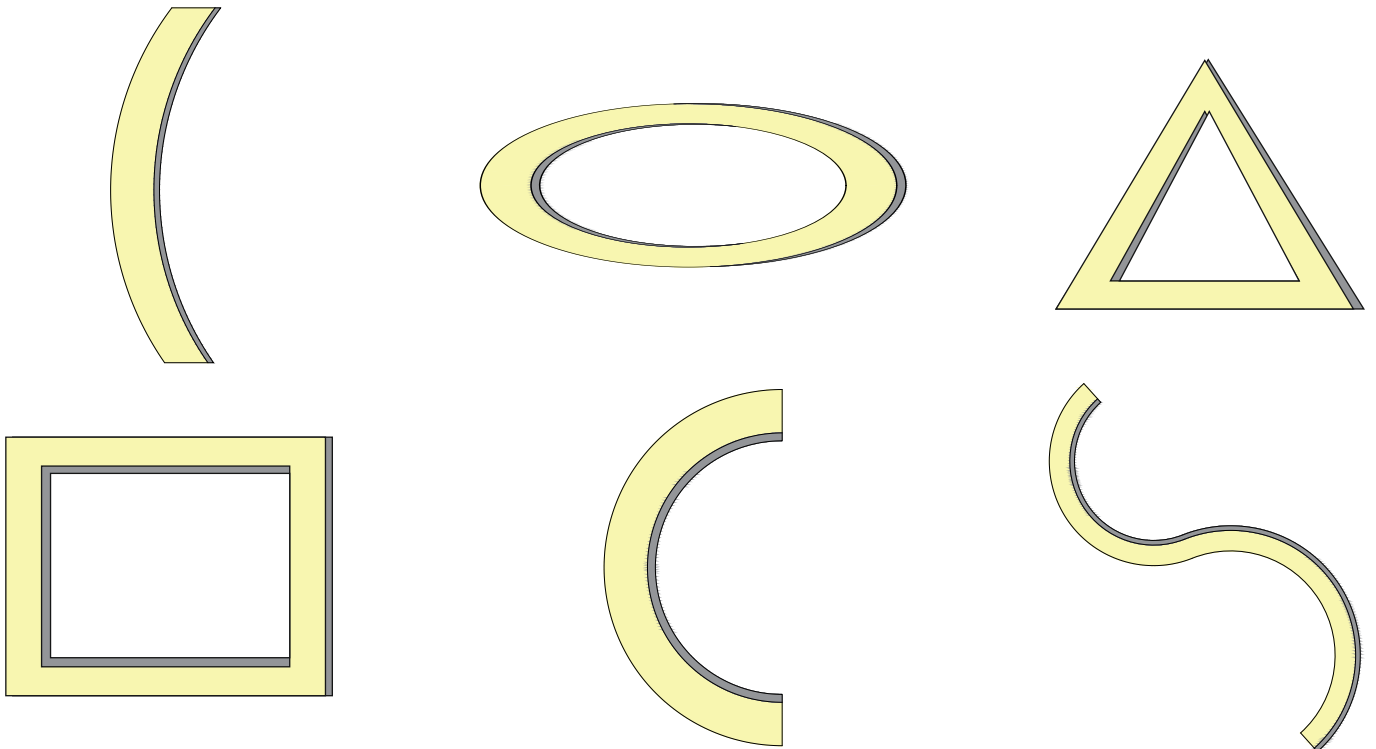

Aurele - Flexi Profile

LED	Typ CRI	Body Finish	Interior Finish	IP Rating	Dimming Options	Filter Options
Low Power 3 Step MacAdam L90-B10 60,000Hrs	92	Matt White Matt Black	NA	IP20	Non Dim Triac Analog Dali	NA

Aurele - Flexi Profile

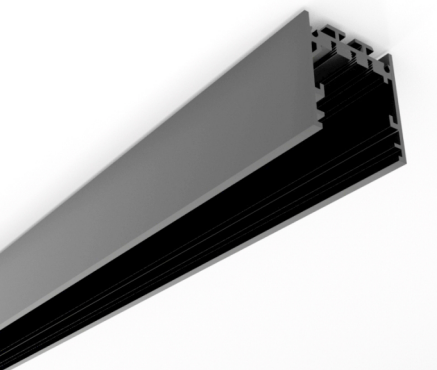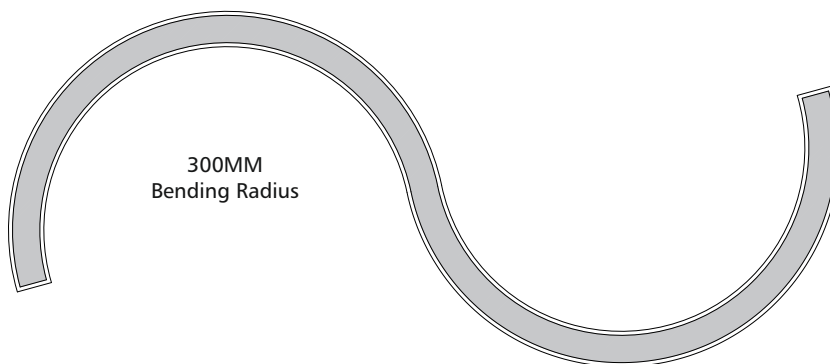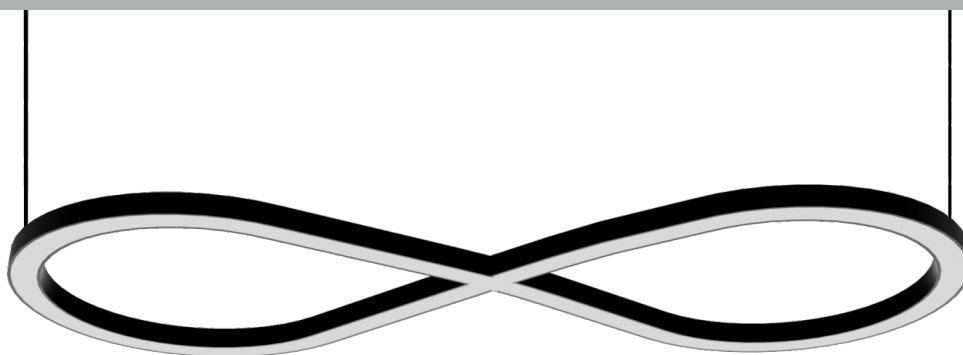


Power	24W/M - 24V
Lumen / CCT	1860lm/m - 2700K 1906lm/m - 3000K 1963lm/m - 4000K
UGR	<19
Beam Angle	Diffused
Driver Placement	Remote


Flexi Profile
#2226

Aurele - Features


Diffused Lighting - Creative Designs

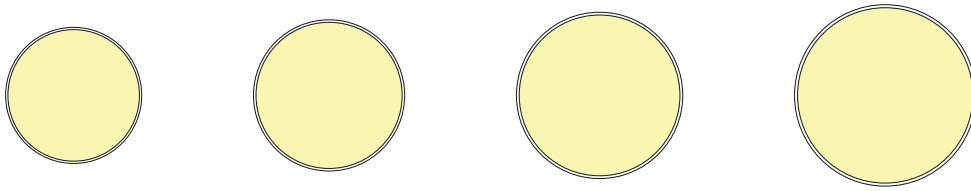


Polo
S - Ø300xH75mm
M - Ø600xH75mm
L - Ø900xH75mm
XL - Ø1200xH75mm

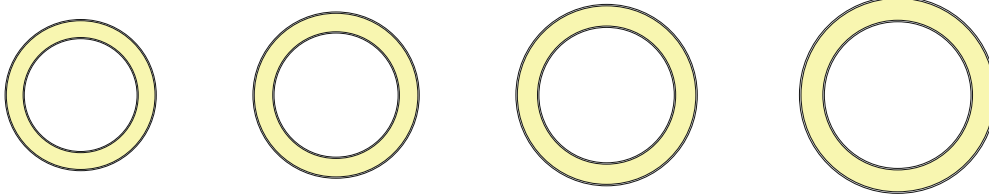


Ring
M - Ø600xH75mm
L - Ø900xH75mm
XL - Ø1200xH75mm
XXL - Ø1500xH75mm

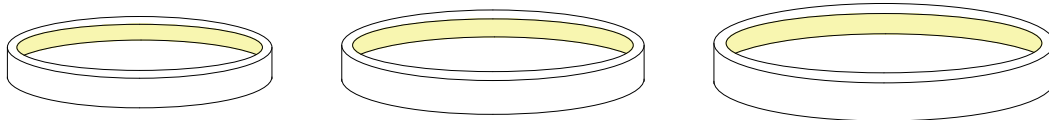

Inwards
M - Ø600xH30mm
L - Ø900xH30mm
XL - Ø1200xH30mm


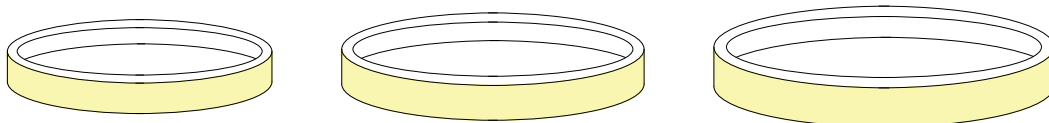



Outwards
M - Ø600xH30mm
L - Ø900xH30mm
XL - Ø1200xH30mm

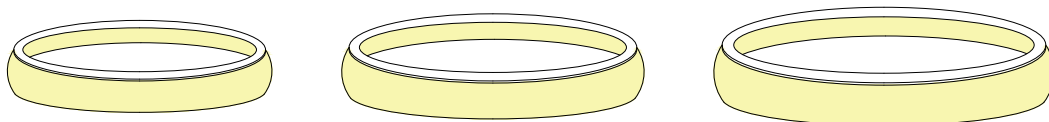

Glow
M - Ø600xH30mm
L - Ø900xH30mm
XL - Ø1200xH30mm

Omni glow linear tubes to ensure even glow on all sides providing a soft diffused output but ensuring high lumen delivery at the same time

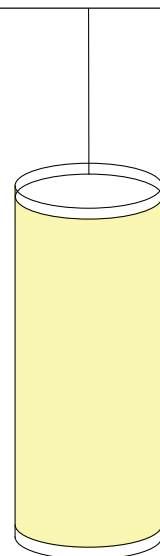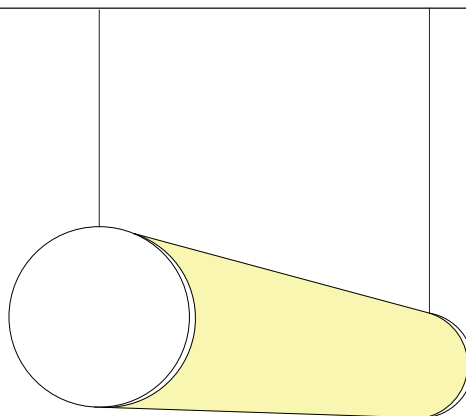


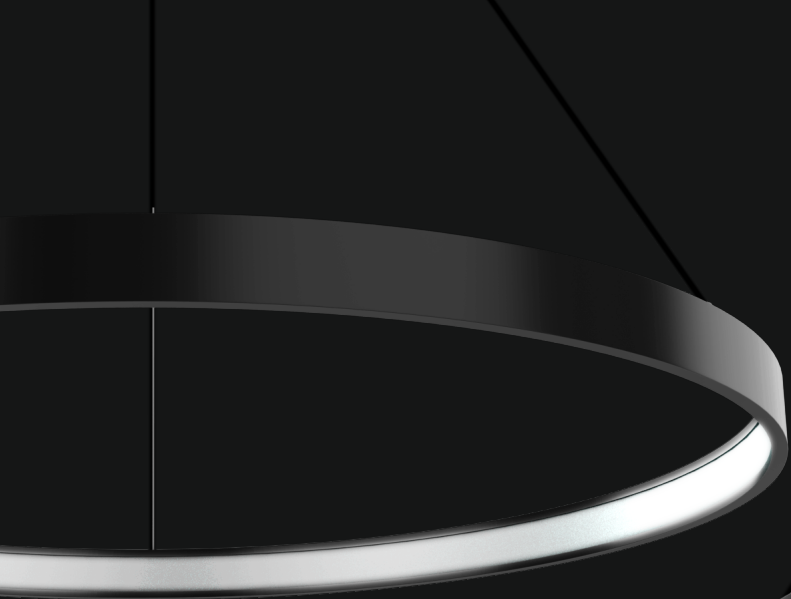

Inward Glow




Outward Glow



Aurele

LED	Typ CRI	Trim Finish	Body Finish	IP Rating	Dimming Options	Filter Options
Mid Power 3 Step MacAdam L90-B10 60,000Hrs	92	Matt White Matt Black	Matt White Matt Black	IP20	Non Dim Triac Analog Dali	NA

Polo Surface / Pendant

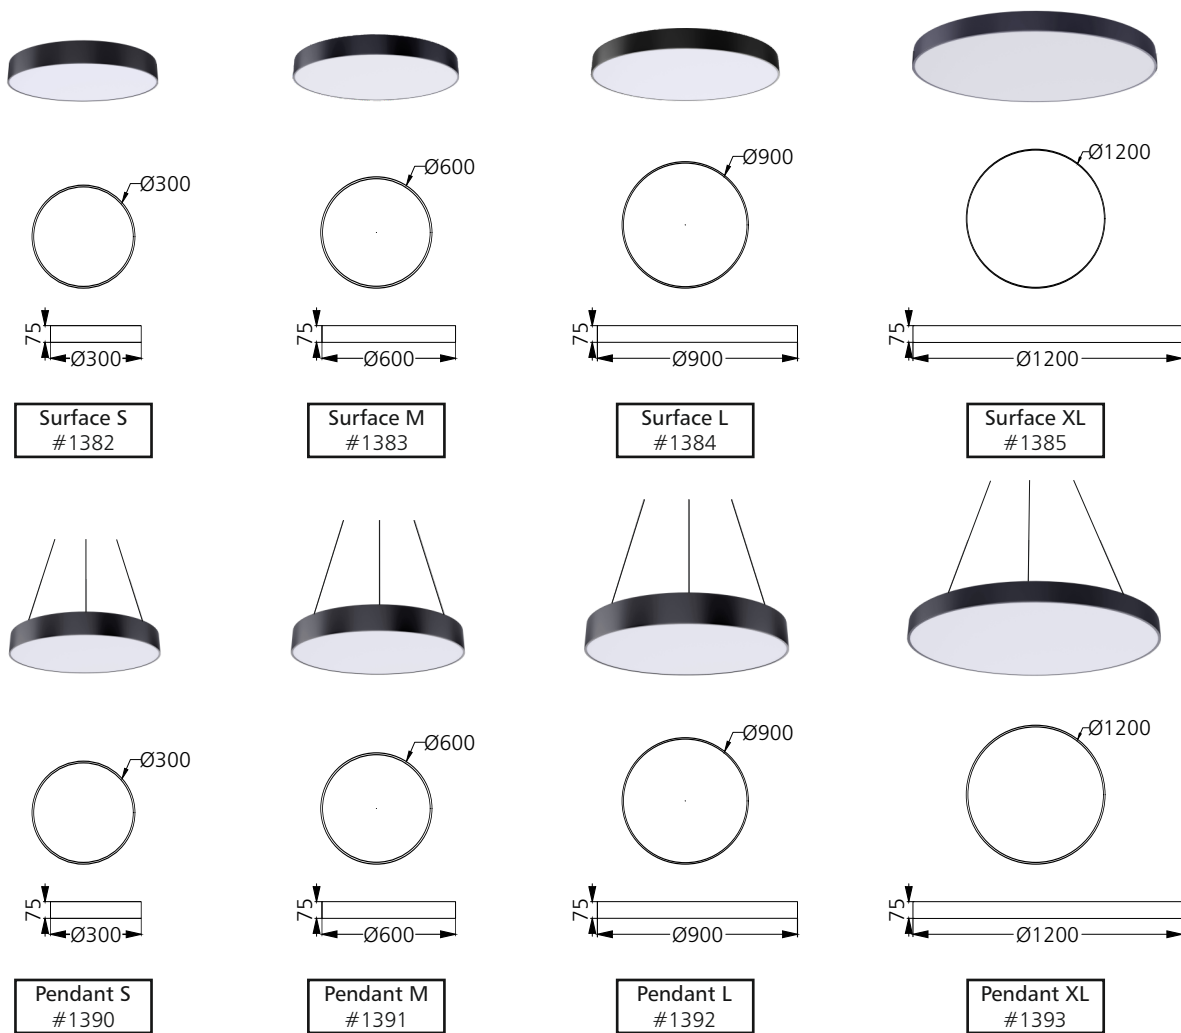


Power	18W - 500mA	36W - 1000mA	54W - 1500mA	72W - 2000mA
Lumen / CCT	1560lm - 3000K 1607lm - 4000K	3120lm - 3000K 3215lm - 4000K	4705lm - 3000K 4845lm - 4000K	6273lm - 3000K 6460lm - 4000K
UGR	<19	<19	<19	<19
Beam Angle	Diffused	Diffused	Diffused	Diffused
Driver Placement	Remote	Remote	Remote	Remote

Aurele

LED	Typ CRI	Trim Finish	Body Finish	IP Rating	Dimming Options	Filter Options
Mid Power 3 Step MacAdam L90-B10 60,000Hrs	92	Matt White Matt Black	Matt White Matt Black	IP20	Non Dim Triac Analog Dali	NA

Ring Surface / Pendant

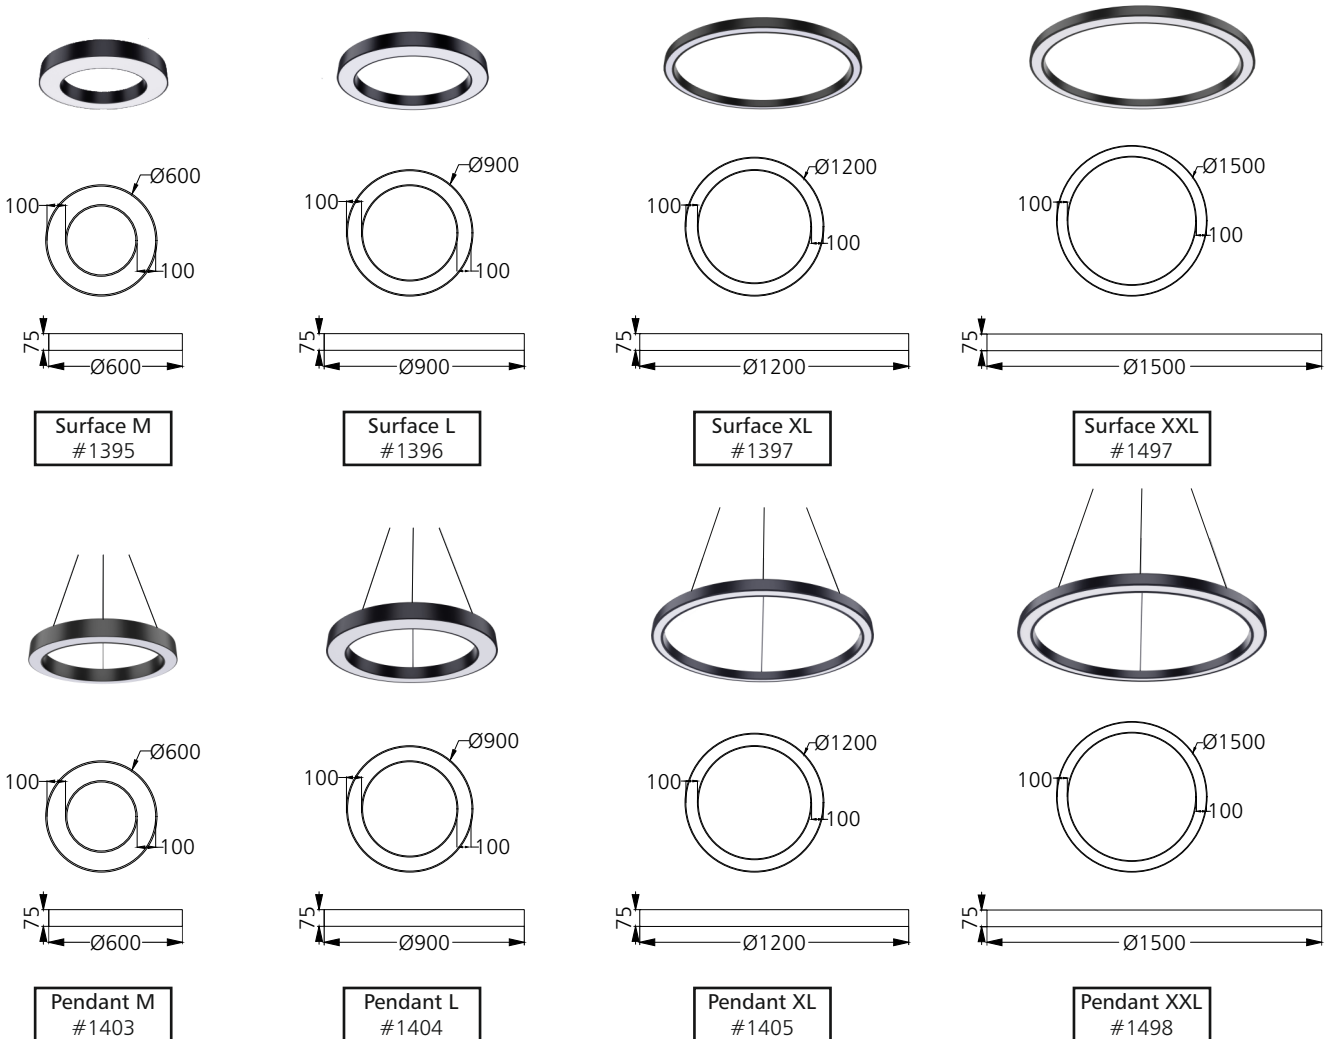


Power	36W - 1000mA	54W - 1500mA	72W - 2000mA	90W - 1250mA
Lumen / CCT	3120lm - 3000K 3215lm - 4000K	4705lm - 3000K 4845lm - 4000K	6273lm - 3000K 6460lm - 4000K	7841lm - 3000K 8075lm - 4000K
UGR	<19	<19	<19	<19
Beam Angle	Diffused	Diffused	Diffused	Diffused
Driver Placement	Remote	Remote	Remote	Remote



Aurele

LED	Typ CRI	Trim Finish	Body Finish	IP Rating	Dimming Options	Filter Options
Low Power 3 Step MacAdam L90-B10 60,000Hrs	92	Matt White Matt Black	Matt White Matt Black	IP20	Non Dim Triac Analog Dali Dali Tunable RF Tunable	NA


Aurele Inwards



Inwards M
#1411



Inwards L
#1412




Inwards XL
#1413

Power	36W - 24V	54W - 24V	72W - 24V
Lumen / CCT	2790lm - 2700K 2860lm - 3000K 2945lm - 4000K Tunable White	4210lm - 2700K 4315lm - 3000K 4445lm - 4000K Tunable White	5580lm - 2700K 5720lm - 3000K 5890lm - 4000K Tunable White
UGR	<19	<19	<19
Beam Angle	Diffused	Diffused	Diffused
Driver Placement	Remote	Remote	Remote



Aurele

LED	Typ CRI	Trim Finish	Body Finish	IP Rating	Dimming Options	Filter Options
Low Power 3 Step MacAdam L90-B10 60,000Hrs	92	Matt White Matt Black	Matt White Matt Black	IP20	Non Dim Triac Analog Dali Dali Tunable RF Tunable	NA



Aurele Outwards



Outwards M
#1415



Outwards L
#1416




Outwards XL
#1417

Power	36W - 24V	54W - 24V	72W - 24V
Lumen / CCT	2790lm - 2700K 2860lm - 3000K 2945lm - 4000K Tunable White	4210lm - 2700K 4315lm - 3000K 4445lm - 4000K Tunable White	5580lm - 2700K 5720lm - 3000K 5890lm - 4000K Tunable White
UGR	< 19	< 19	< 19
Beam Angle	Diffused	Diffused	Diffused
Driver Placement	Remote	Remote	Remote


Aurele

LED	Typ CRI	Body Finish	IP Rating	Dimming Options	Filter Options
Low Power 3 Step MacAdam L90-B10 60,000Hrs	92	Matt White Matt Black	IP20	Non Dim Triac Analog Dali Dali Tunable RF Tunable	NA



Aurele Glow



Glow M
#1419



Glow L
#1420






Glow XL
#1421

Power	36W - 24V	54W - 24V	72W - 24V
Lumen / CCT	2790lm - 2700K 2860lm - 3000K 2945lm - 4000K Tunable White	4210lm - 2700K 4315lm - 3000K 4445lm - 4000K Tunable White	5580lm - 2700K 5720lm - 3000K 5890lm - 4000K Tunable White
UGR	< 19	< 19	< 19
Beam Angle	Diffused	Diffused	Diffused
Driver Placement	Remote	Remote	Remote



Aurele

LED	Typ CRI	Trim Finish	Max Length	Standard Length	IP Rating	Dimming Options
Low Power 3 Step MacAdam L90-B10 60,000Hrs	92	Matt White Matt Black	3000MM	1000MM 2000MM 3000MM	IP20	Non Dim Triac Analog Dali Dali Tunable RF Tunable

Aurele Omni

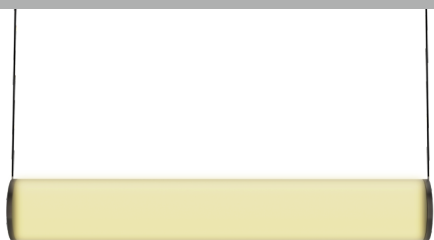

Horizontal
#2220

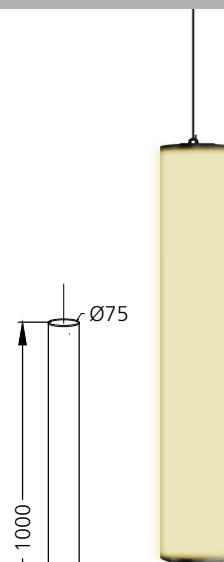

Vertical
#2221

Power	30W - 24V
Lumen / CCT	2535lm - 2700K 2595lm - 3000K 2675lm - 4000K Tunable White
UGR	< 19
Beam Angle	Diffused
Driver Placement	Remote

Power	30W - 24V
Lumen / CCT	2535lm - 2700K 2595lm - 3000K 2675lm - 4000K Tunable White
UGR	< 19
Beam Angle	Diffused
Driver Placement	Remote





Project - Wework Offices
Pan India

Aurele



LED	Typ CRI	Body Finish	IP Rating	Dimming Options	Filter Options
Mid Power 3 Step MacAdam L90-B10 60,000Hrs	92	Matt White Matt Black	IP20	Non Dim Triac Analog Dali	NA

Aurele Dome





Dome
#1406

Aurele Cone



Cone
#1407

Aurele Mesh



Mesh
#1409

Power	24W+10W - 300mA+250mA
Lumen / CCT	2080lm+860lm - 3000K 2145lm+890lm - 4000K
UGR	<19
Beam Angle	Diffused
Driver Placement	Remote

Power	24W - 300mA
Lumen / CCT	2080lm - 3000K 2145lm - 4000K
UGR	<19
Beam Angle	Diffused
Driver Placement	Remote

Power	24W - 300mA
Lumen / CCT	2080lm - 3000K 2145lm - 4000K
UGR	<19
Beam Angle	Diffused
Driver Placement	Remote