



Marcopia



An extensive range of round and square planter
uplights & projectors with feature add ons like
tree straps or pole mounted brackets



Project - Six Senses Spa & Resort
Thimpu, Bhutan

Marcopia Round - Features


A complete range of round fixtures for planter uplights and projectors

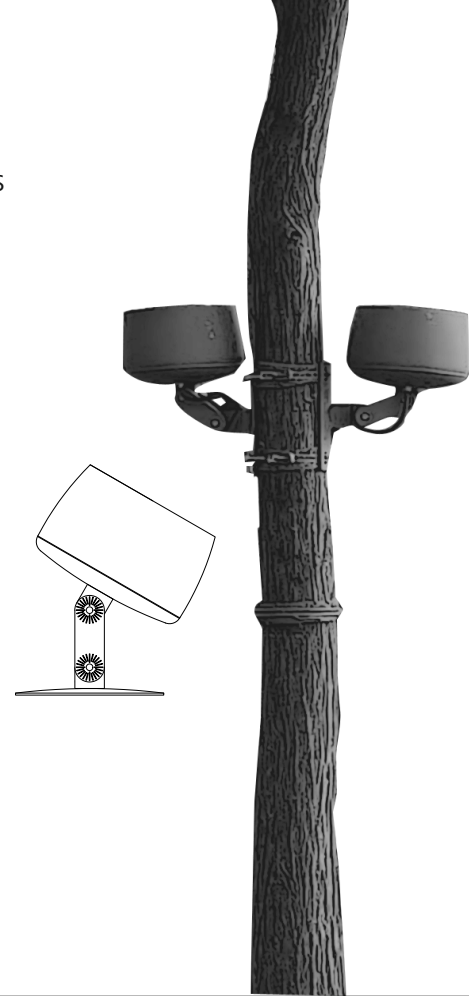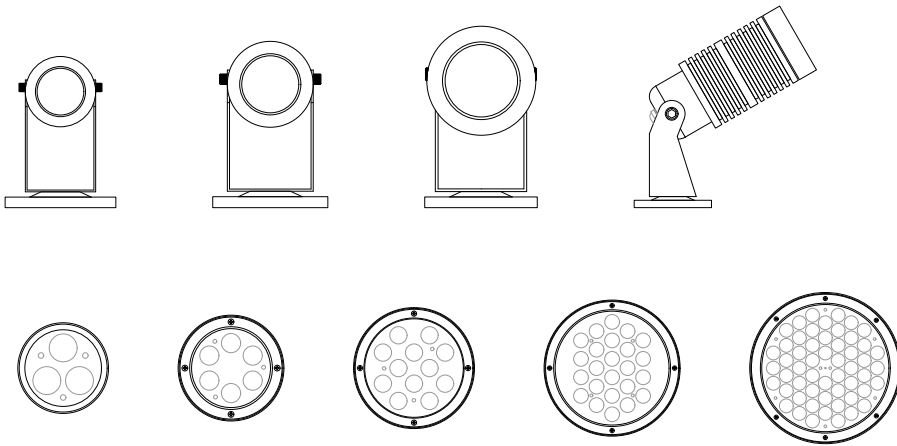


- 8 Sizes
- Multiple Beam Angle Options
- Pole & Wall Mount Bracket
- Tree Strap Mounting
- Base & Spike Mount Options
- Add-on cowl accessory
- RGB Digital Control

Marcopia Square - Features


A complete range of square fixtures for planter uplights and projectors

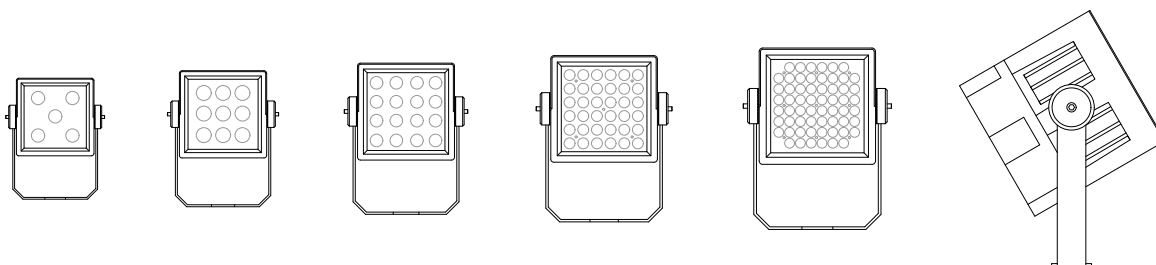


- 5 Sizes
- Multiple Beam Angle Options
- Tree Strap Mounting
- Base & Spike Mount Options
- Add-on cowl accessory
- RGB Digital Control

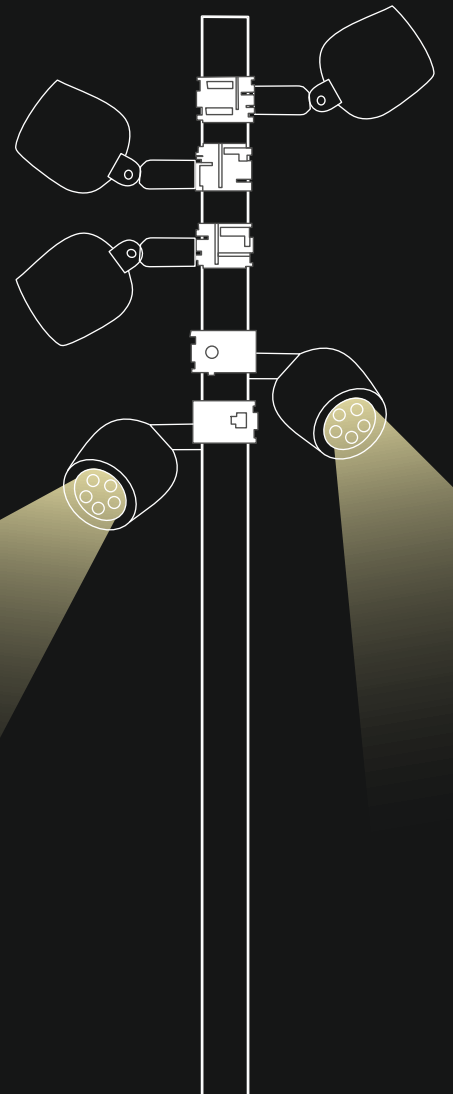

Marcopia


LED	Typ CRI	Body Finish	Voltage	IP / IK Rating	Dimming Options	Filter Options	Accessories
Array 3 Step MacAdam L90-B10 60,000Hrs	95	Matt Grey Matt Black	AC230V DC24V	IP65 IK05	Non Dim Triac Analog Dali 	Honeycomb	Cowl Spike Tree Strap

Marcopia Round

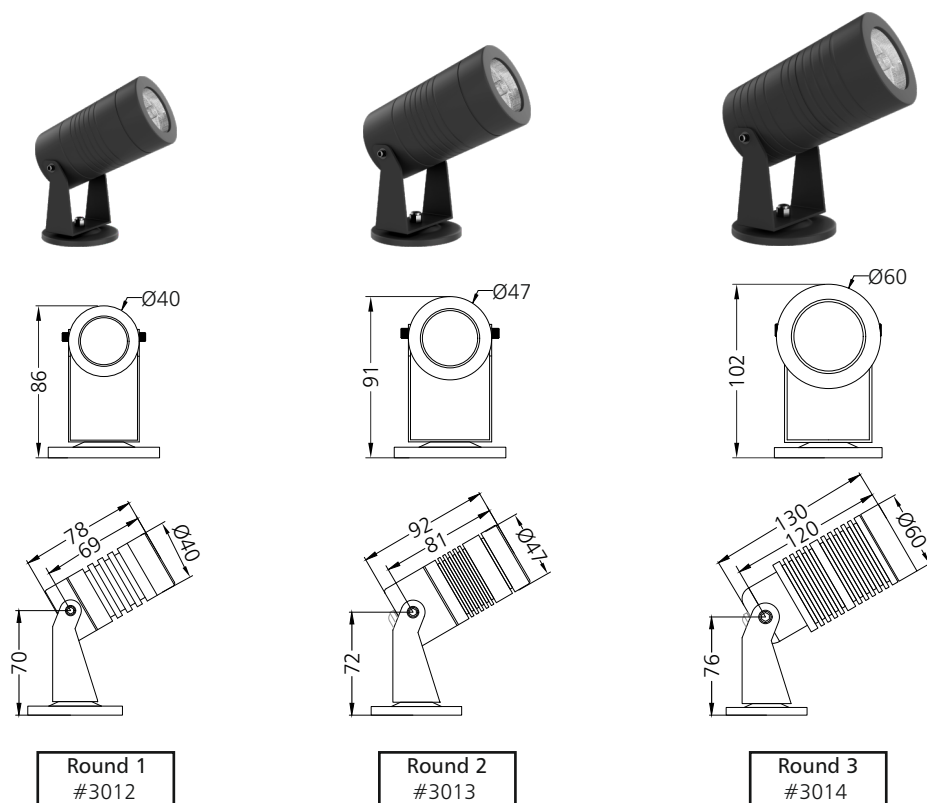


Power	1W/3W	6W	10W/12W
Lumen / CCT	85lm/250lm - 3000K	545lm - 3000K	910lm/1090lm - 3000K 460lm/550lm - Red 720lm/865lm - Green 390lm/465lm - Blue
UGR	<19	<19	<19
Beam Angle	15° 24° 38°	15° 24° 38°	10° 15° 24° 36° 60°
Driver Placement	In-built - AC230V Remote - DC24V	In-built - AC230V Remote - DC24V	In-built - AC230V Remote - DC24V

Marcopia


LED	Typ CRI	Body Finish	Voltage	IP / IK Rating	Dimming Options	Filter Options	Accessories
High Power 3 Step MacAdam L90-B10 60,000Hrs	92	Matt Grey	AC230V DC24V	IP65 IK05	Non Dim Triac Analog Dali 	Honeycomb	Cowl Pole Bracket Spike Tree Strap

Marcopia Round

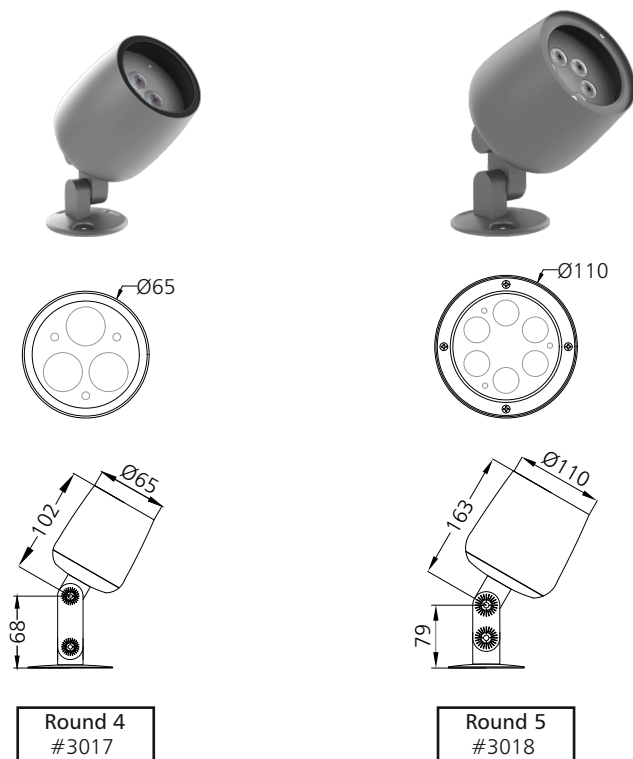


Power	6W/9W	9W/18W
Lumen / CCT	510lm/765lm - 3000K 276lm/415lm - Red 432lm/650lm - Green 234lm/350lm - Blue	765lm/1520lm - 3000K 415lm/830lm - Red 650lm/1295lm - Green 350lm/700lm - Blue
UGR	<19	<19
Beam Angle	10° 15° 24° 38° 45° 60°	10° 15° 24° 38° 45° 60°
Driver Placement	In-built - AC230V Remote - DC24V	In-built - AC230V Remote - DC24V

Marcopia


LED	Typ CRI	Body Finish	Voltage	IP / IK Rating	Dimming Options	Filter Options	Accessories
High Power 3 Step MacAdam L90-B10 60,000Hrs	92	Matt Grey	AC230V DC24V	IP65 IK05	Non Dim Triac Analog Dali 	Honeycomb	Cowl Pole Bracket Tree Strap

Marcopia Round


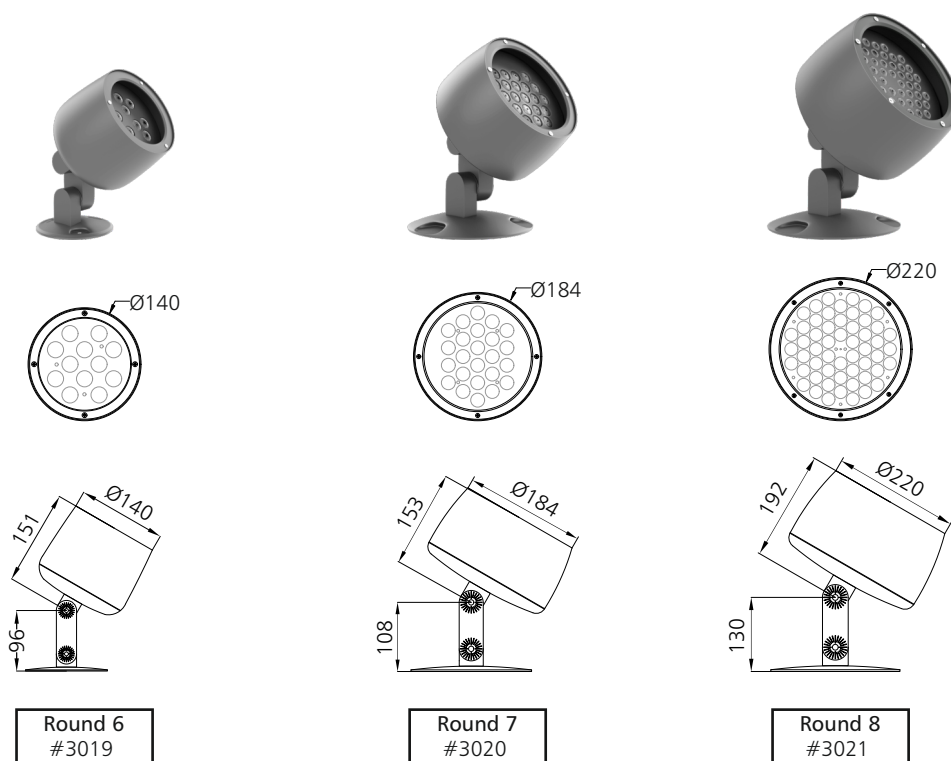


Power	12W/25W	25W/48W	72W/90W
Lumen / CCT	1015lm/2030lm - 3000K 550lm/1105lm - Red 865lm/1730lm - Green 465lm/935lm - Blue	2030lm/4060lm - 3000K 1105lm/2210lm - Red 1730lm/3455lm - Green 935lm/1870lm - Blue	6080lm/7610lm - 3000K 3310lm/4140lm - Red 5190lm/6480lm - Green 2810lm/3510lm - Blue
UGR	<19	<19	<19
Beam Angle	10° 15° 24° 38° 45° 60°	10° 15° 24° 38° 45° 60°	10° 15° 24° 38° 45° 60°
Driver Placement	In-built - AC230V Remote - DC24V	In-built - AC230V Remote - DC24V	In-built - AC230V Remote - DC24V



Marcopia

LED	Typ CRI	Body Finish	Voltage	IP / IK Rating	Dimming Options	Filter Options	Accessories
High Power 3 Step MacAdam L90-B10 60,000Hrs	92	Matt Grey Matt Black	AC230V DC24V	IP65 IK05	Non Dim Triac Analog Dali 	Honeycomb	Cowl Spike

Marcopia Square




Square 3
#3006




Square 4
#3007

Power	9W/18W	16W/32W
Lumen / CCT	790lm/1580lm - 3000K 440lm/880lm - Red 685lm/1365lm - Green 380lm/760lm - Blue	1404lm/2805lm - 3000K 785lm/1570lm - Red 1216lm/2430lm - Green 670lm/1345lm - Blue
UGR	< 19	< 19
Beam Angle	5° 10° 15° 24° 38° 45° 60°	5° 10° 15° 24° 38° 45° 60°
Driver Placement	In-built - AC230V Remote - DC24V	In-built - AC230V Remote - DC24V

Marcopia

LED	Typ CRI	Body Finish	Voltage	IP / IK Rating	Dimming Options	Filter Options	Accessories
High Power 3 Step MacAdam L90-B10 60,000Hrs	92	Matt Grey	AC230V	IP65 IK05	Non Dim Triac Analog Dali 	Honeycomb	Cowl

Marcopia Square

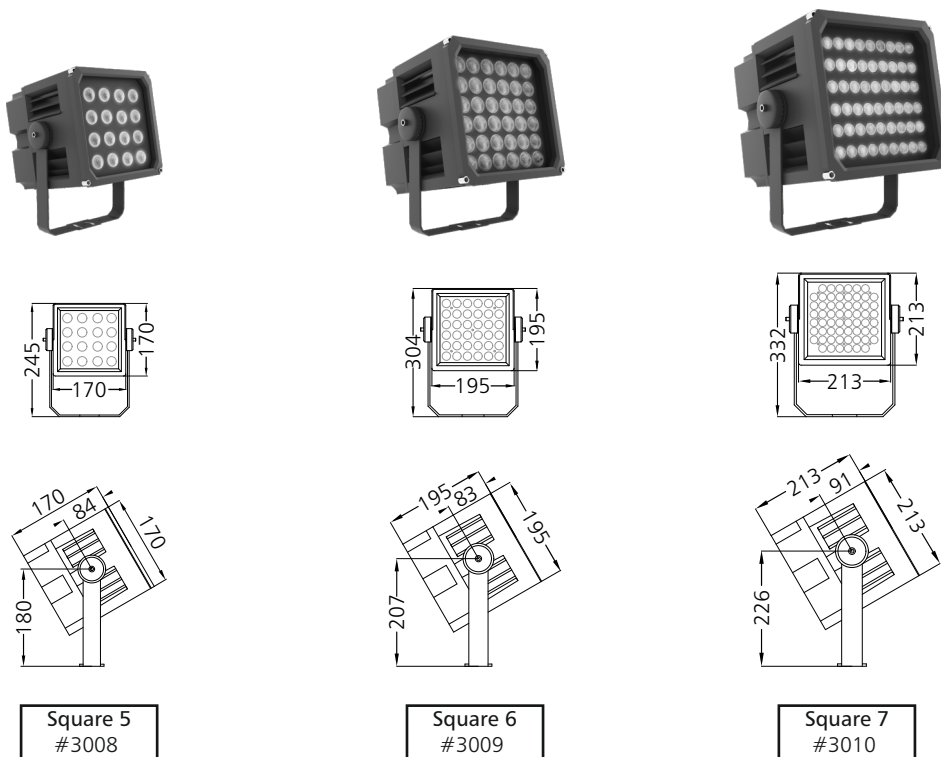

	Square 5 #3008	Square 6 #3009	Square 7 #3010
Power	25W/48W	36W/72W	60W/120W
Lumen / CCT	2105lm/4210lm - 3000K 1175lm/2350lm - Red 1825lm/3645lm - Green 1010lm/2016lm - Blue	3150lm/6310lm - 3000K 1765lm/3525lm - Red 2735lm/5470lm - Green 1510lm/3025lm - Blue	5255lm/10515lm - 3000K 2940lm/5880lm - Red 4560m/9120lm - Green 2520lm/5040lm - Blue
UGR	<19	<19	<19
Beam Angle	5° 10° 15° 24° 38° 45° 60°	5° 10° 15° 24° 38° 45° 60°	5° 10° 15° 24° 38° 45° 60°
Driver Placement	In-built - AC230V	In-built - AC230V	In-built - AC230V