

# Acumis Surface S - #2111



12W




1095lm



3000K




Diffused

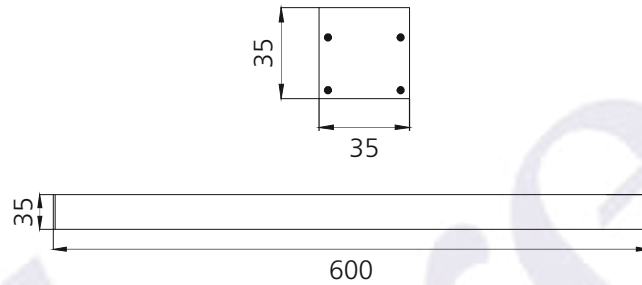

## Photometric Data

Light source	LED - Mid Power	Light output ratio	69%
Power (W)	12W	Color rendering index (Ra)	>92
Delivered lumens	1095lm	Color rendering index (R9)	>50
Source lumens	1572lm	Binning MacAdam	<3 SDCM
Colour temperature (K)	3000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	91.25lm/W	UGR	<19
Beam angle	Diffused	Operating temperature	-20°C to +50°C
Cutoff angle	NA	Light distribution	Direct - Diffused




## Technical Data


Mounting detail	Surface	Product weight	347gms Per 600MM
Fixing detail	Mounting Clamp	Safety class	III
Orientation	Fixed	Insulation class	III
IP rating	IP20	Voltage	AC230V
Glow wire test	850°	Forward voltage	DC24V
Trim material	NA	Driver	CV - Remote
Heatsink material	Aluminum Extrusion		

1. Shows an isometric view of the render of an Acumis Surface Fixture.
2. Shows an isometric view of the Acumis Surface Fixture.
3. Shows a Close-up of the 'I' joint.
4. Shows a Close-up of the 'L' joint.
5. Shows the Bottom view of the Acumis Surface Fixture in rectangular configuration.
6. Shows the Bottom view of the Acumis Surface Fixture in 'L' configuration.


- A. Shows a hairline cut on the diffuser when the fixture is made in the 'L' configuration.
- B. Shows a hairline cut on the profile at 300mm from the edge.
- C. Shows a hairline cut on the profile at the joint between two straight sections.

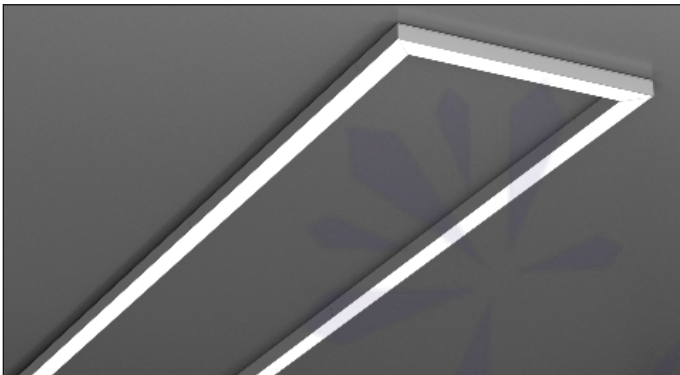

①

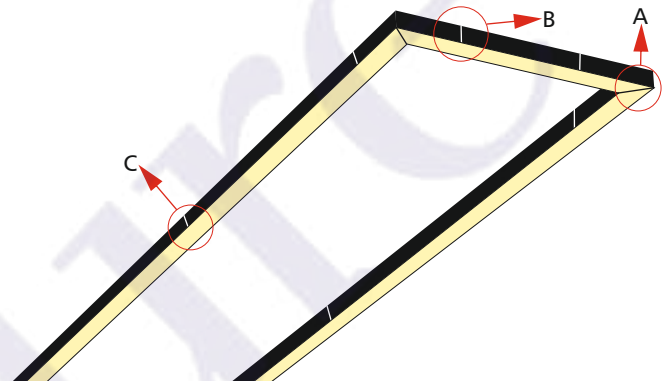


②




'I' joint

③




'L' joint

④

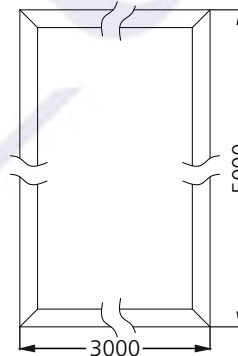

⑤

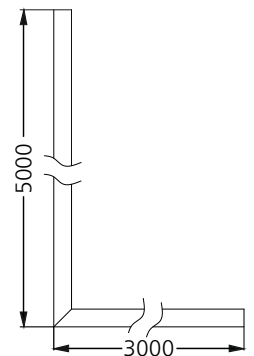


⑥


- Straight Sections (Profile) - Maximum possible straight length without any cuts on the profile is 3 mtrs. A hairline cut is visible at the joint, which is needed at every 3 mtrs interval. (Eg.) If a straight length of 9 mtrs is required, then two joints are needed; the 1st at 3 mtrs and the 2nd at 6 mtrs.
- Straight Sections (Diffuser) - Maximum possible straight length without any cuts on the diffuser is 30 mtrs. A hairline cut is visible at a joint, which is needed at every 30 mtrs interval. (Eg.) If a straight length of 32 mtrs is required, then one joint is required at 30 mtrs. Kindly Note: For this example, The number of profile joints is 10 (one at every 3 mtrs interval).
- For 'L' Sections - A Profile of lengths 300mm x 300mm is made. Then it is attached to the Straight Sections. (Eg.) If a L' section of 3 mtrs x 5 mtrs is required. First a 300mm x 300mm 'L' section is made. Then one straight section of 2.7 mtrs is joint to the 300mm x 300mm 'L' section on the 3 mtrs side. On the 5mtrs side, Two straight sections of lengths 3 mtrs and 1.7 mtrs are joint in tandem with the 300mm x 300mm 'L' section. (Refer to image 6 and image 2) Kindly Note - Although the profile will have 4 joints, the diffuser will have only one joint at the center.
- For Rectangular Sections - Similar in construction to the 'L' section, except the rectangular section consists of four 'L' sections of 300mm x 300mm that are connected by straight sections of the required lengths. (Refer to image 1, 2 and 5)
- 'I' Joint - An 'I' jointer is used to connect two straight sections. (Refer to image 3)
- 'L' Joint - two profiles are cut at an angle of 45 degrees and joint together using a 'L' jointer. (refer to image 4)

## Photometric Graphs


Hue Bin vs Rf Graph




Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph



## Finish Options

### Body Finish

- Matt White
- Matt Black
- Custom RAL Color

### Min Length

50MM


### Max Length

3000MM

### Diffuser

Standard Opal Diffuser  
Microprismatic Opal Diffuser

## Joint Options



'I' Joint



'L' Joint

## Dimming Options



Constant Voltage Driver  
75w DC24V  
Non Dimmable



Constant Voltage Driver  
75w DC24V  
Triac Dimmable



Constant Voltage Driver  
75w DC24V  
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver  
75w DC24V  
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.  
Due to which the data mentioned in the data sheet is subject to change without prior notice.