

# Hypogean Tilt RA-3 - #3042



6W





243lm



Blue





45°

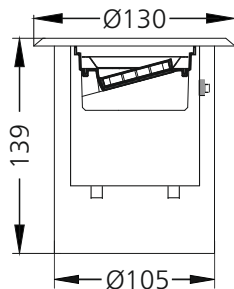

## Photometric Data

Light source	LED - High Power	Beam angle	45°
Power (W)	6W	Light output ratio	71%
Delivered lumens	243lm	LED life	L90 B10 Tj75°C
Source lumens	342lm	UGR	<19
Colour temperature (K)	Blue	Operating temperature	-20°C to +50°C
Luminaire efficacy	40.65lm/W	Light distribution	Direct - Symmetric

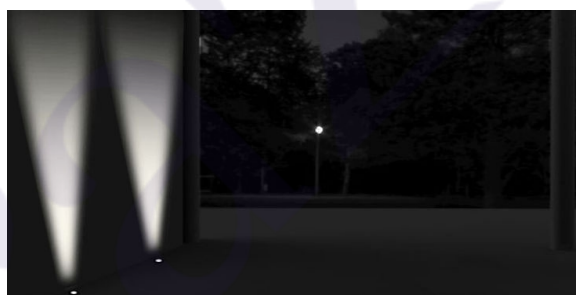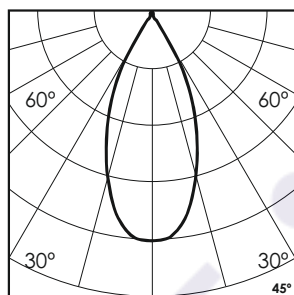

## Technical Data

Mounting detail	Inground Light	Glow wire test	850°
Fixing detail	Backbox	Product weight	1121gms
Orientation	Adjustable	Safety class	III
IP rating	IP67	Insulation class	III
IK rating	IK08	Voltage	DC24V
Heatsink material	Diecast alm.	Driver	Remote - DC24V
Ring material	SS		

## Finish Options

### Trim Finish

- SS
- Custom RAL Color

## Filter Options



Honeycomb Filter

Above filters can be added to the fixture and need to be ordered as a separate accessory

## Dimming Options



Remote DMX Decoder

The DMX Decoder requires a 24V CV Driver

L'azure constantly strives to improve our products using the latest technological advancements in the industry.  
Due to which the data mentioned in the data sheet is subject to change without prior notice.