

Hypogean Tilt RA-3 - #3042



9W





688lm



Green





60°

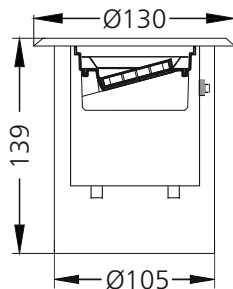

Photometric Data

| | | | |
|------------------------|------------------|-----------------------|--------------------|
| Light source | LED - High Power | Beam angle | 60° |
| Power (W) | 9W | Light output ratio | 69% |
| Delivered lumens | 688lm | LED life | L90 B10 Tj75°C |
| Source lumens | 990lm | UGR | <19 |
| Colour temperature (K) | Green | Operating temperature | -20°C to +50°C |
| Luminaire efficacy | 76.48lm/W | Light distribution | Direct - Symmetric |

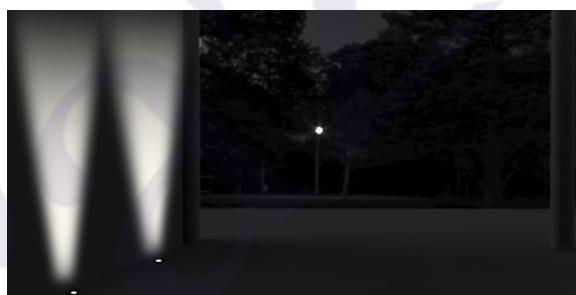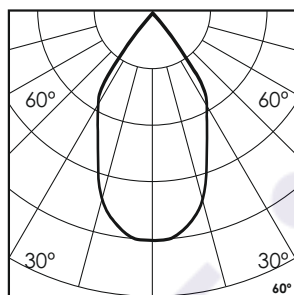

Technical Data

| | | | |
|-------------------|----------------|------------------|----------------|
| Mounting detail | Inground Light | Glow wire test | 850° |
| Fixing detail | Backbox | Product weight | 1121gms |
| Orientation | Adjustable | Safety class | III |
| IP rating | IP67 | Insulation class | III |
| IK rating | IK08 | Voltage | DC24V |
| Heatsink material | Diecast alm. | Driver | Remote - DC24V |
| Ring material | SS | | |

Finish Options

Trim Finish

- SS
- Custom RAL Color

Filter Options



Honeycomb Filter

Above filters can be added to the fixture and need to be ordered as a separate accessory

Dimming Options



Remote DMX Decoder

The DMX Decoder requires a 24V CV Driver

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.