

# Incis - Tribeca - #2219



72W





7872lm



3000K




24°

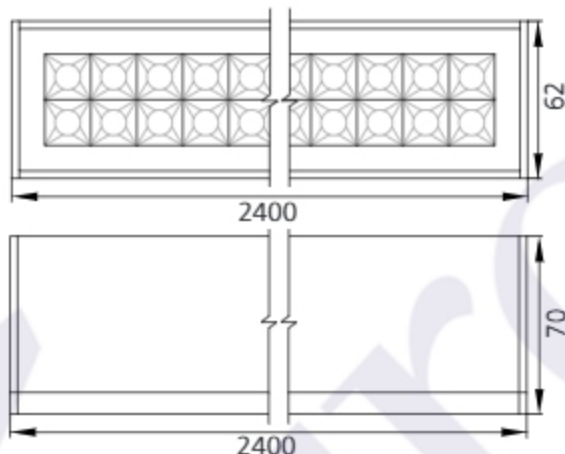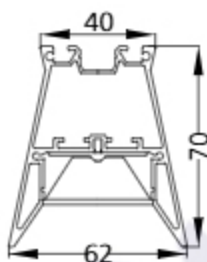

## Photometric Data

Light source	LED - High Power	Light output ratio	83%
Power (W)	72W	Color rendering index (Ra)	> 92
Delivered lumens	7872lm	Color rendering index (R9)	> 50
Source lumens	9432lm	Binning MacAdam	< 3 SDCM
Colour temperature (K)	3000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	109lm/W	UGR	< 19
Beam angle	24°	Operating temperature	-20°C to + 50°C
Cutoff angle	27°	Light distribution	Direct - Symmetric

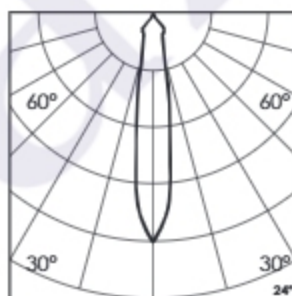


## Technical Data


Mounting detail	Pendant	Product weight	1776gms
Fixing detail	Suspension Wire	Safety class	III
Orientation	Fixed	Insulation class	III
IP rating	IP20	LED current (mA)	Depend on length
Glow wire test	850°	Voltage	AC230V
Trim material	NA	Forward voltage	DC24V
Heatsink material	Aluminum Extrusion	Driver	In-built

## Photometric Graphs


Hue Bin vs Rf Graph

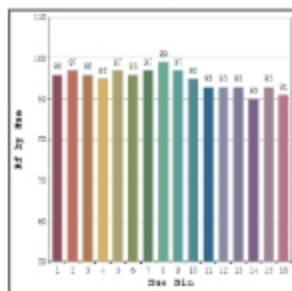


Color Vector Graph

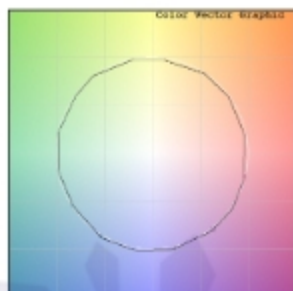

Spectrum vs Wavelength Graph

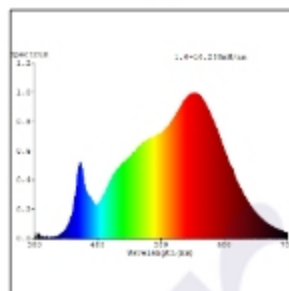

CIE Chromaticity Graph

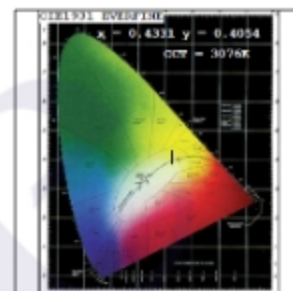

## Finish Options

### Body Finish

- Matt White
- Matt Black
- Custom RAL Color

### Reflector Finish

- Matt Black

## Dimming Options



Non Dimmable  
In-built Driver



Triac Dimmable  
In-built Driver



Analog 0-10V / 1-10V Dimmable  
In-built Driver



Dali Dimmable  
In-built Driver

L'azure constantly strives to improve our products using the latest technological advancements in the industry.  
Due to which the data mentioned in the data sheet is subject to change without prior notice.